


LED Rainbow Flex

Features


- Milky, Crystal and Colored PVC flexible jacket design
- UV stable outer plastic jacket
- Continuous & uniform illumination with no dots or dark spots
- Low voltage in 12V or 24V (Also available in AC 220V)
- Durability and impact resistant
- Does not interfere with video / audio system nearby
- Life span of up to 15,000 hrs
- Available in single color (Red, Yellow, Green, Blue, White, Warm White & Pink) or RGB colors

Specification

LED Type	Epistar SMD 5050			SMD 2835		
LED Color	RGB			Single (Mono)		
Input Voltage	DC 12V	DC 24V	AC 220V	DC 12V	DC 24V	AC 220V
Cutting Length	8.33cm	16.7cm	200cm	8.33cm	16.7cm	200cm
Watt / meter	13W/m			9W/m		
Max Load Length	10m		100m	10m		100m

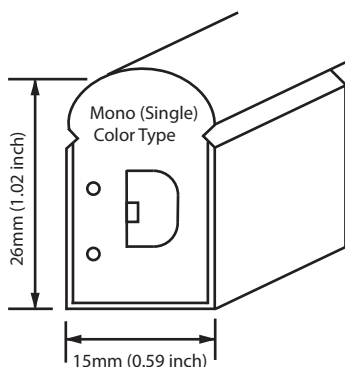

For Mono (Single) color LED Rainbow Flex will have 2 Pins

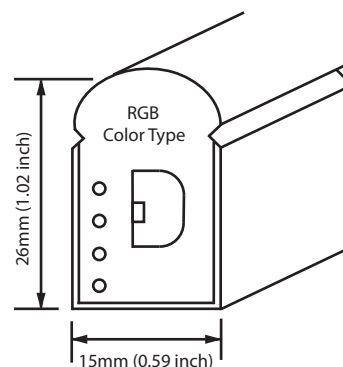

For RGB color LED Rainbow Flex will have 4 Pins

Note : Rainbow Flex is also available in other dimensions. Please check with your Ushio sales representative for more details.

